




Wall Mount Fiber Optic Distribution Unit

BJ-2106

48/72 Port Wall Mount

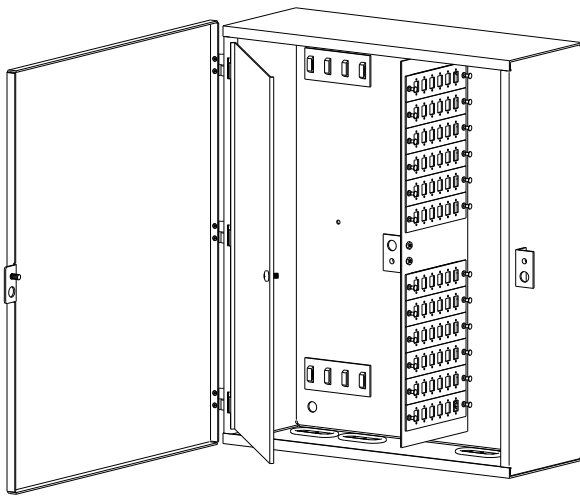

Application

Designed for airports and other secure areas, this unit provides for fiber cross connection, termination, and splicing in a single unit. Excellent for high-density installations.

Specifications

Capacity:	Twelve Plates
Dimensions:	20.25"H X 17.5"W X 6"D
Weight:	35 lbs.
Construction:	Steel
Color:	Green

Features

- Terminates 72 fibers with standard 6 port coupler plates
- Room for fiber storage and/or splicing
- Outer door is gasketed, removable, secured by an irremovable screw, and can be locked with a padlock
- Inner door is removable and is secured with irremovable screw
- Fiber access through bottom only

Ordering Information

Part Number

BJ-2106D-001

Description

FDU: Wall Mount, 12 Plates, Dust Proof, Green, Inner and Outer Doors

