




Weatherproof Fiber Optic Distribution Units

BJ-2179

18 Port Wall Mount

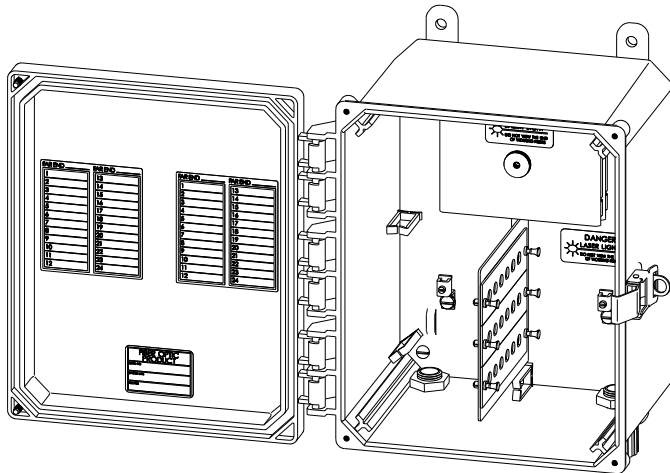

Application

These units are both watertight and airtight. Designed for use in wet, industrial and outdoor locations.

Specifications

Capacity: Three Plates
 Dimensions: 12" H X 10" W X 7" D
 Weight: 4 lbs.
 Construction: Molded fiberglass rated NEMA 4
 Color: Gray

Features

- Terminates 18 fibers with standard 6-port coupler plates
- Fully weatherproof, NEMA 4X Rated
- High strength polycarbonate enclosure
- Hinged cover with polyurethane gasket
- Stainless steel latch with hasp for padlock
- Use with BJ-2188C-024 splice trays
- Pole mounting kit available, part # BJ-2179P-001

Ordering Information

Part Number	Description
BJ-2179A-001	FDU: Outdoor, 3 Plates, Clear Lid, Room for Splicing
BJ-2179B-002	FDU: Outdoor, 3 Plates, Opaque Lid, Room for Splicing

