




Weatherproof Fiber Optic Distribution Units

BJ-2180

36-72 Port Wall Mount

Application

These units are both watertight and airtight. Designed for use in wet, industrial and outdoor locations.

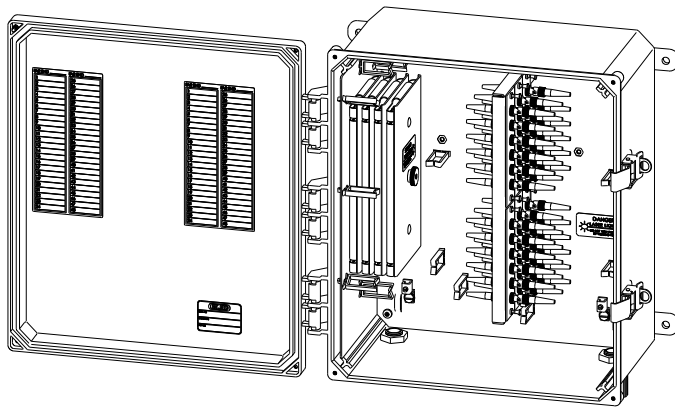


Specifications

- Capacity: Six Coupler Plates
- Dimensions: 16" H X 14" W X 8" D
- Weight: 9 lbs. 2 oz.
- Construction: Molded Polycarbonate, rated NEMA 4
- Color: Gray

Features

- Terminates 36 fibers with standard 6-port coupler plates
- Fully weatherproof, NEMA 4X rated
- High strength polycarbonate enclosure
- Hinged cover with polyurethane gasket
- Stainless steel latch with hasp for padlock
- Use with BJ-1742D or BJ-2188 series splice trays
- Pole mounting kit available, part # BJ-2180P-001

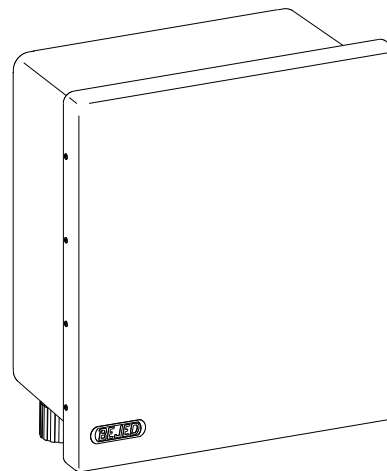

Ordering Information

Part Number	Description
BJ-2180A-001	FDU: Outdoor, 6 plates, Clear Lid, Room for Splicing
BJ-2180B-001	FDU: Outdoor, 6 plates, Opaque Lid, Room for Splicing
BJ-2180S-001	Splice Storage Unit: Outdoor, Medium, Clear Lid
BJ-2180S-002	Splice Storage Unit: Outdoor, Medium, Opaque Lid

